


12.) Select the proper angle data. (See pic08.)

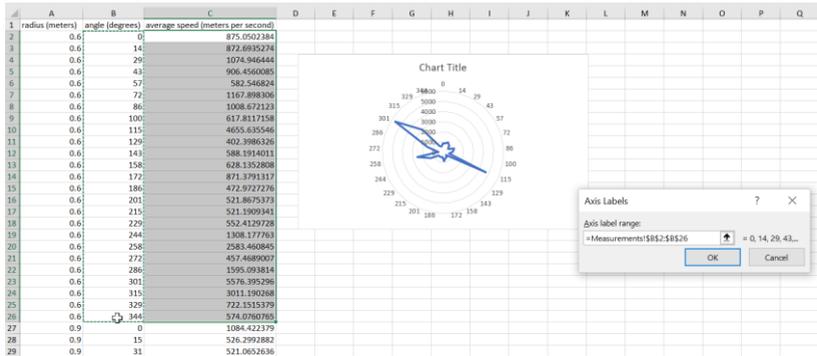

13.) Push Ok and Ok, and your graph is ready.

14.) Repeat if you need graphs from another radius.

Maintenance

Keep the device in a dry place in room temperature.

If you have to clean it, please use a lightly wet towel.

If resin got to the sensors you can clean them with benzine.
Take care of the handling of the chemical.

If any of the parts are broken please contact us.

It is recommended to switch off the device after measurement.

Do not break the cables and keep them coiled up to avoid tangle.

Guarantee

The guarantee lasts for one year from the arrival of the device.

Important note

The root detector device will find the main roots and will find them if there is enough wood to let the sound signal on. This test can not differ between damaged and non-damaged roots. No data on root system stability or safety will be provided.