

Indoor Ambience Monitoring Sensor

Featuring LoRaWAN®

AM30x

The Milesight logo, featuring a stylized blue 'M' followed by the word 'Milesight' in a black, italicized sans-serif font.

◆ Introduction

AM30x is a compact indoor ambience monitoring sensor for measurement of temperature, humidity, light, CO₂ concentration, TVOC, barometric pressure, PM2.5, PM10 and motion. The data will be shown on the E-ink screen in real-time, which helps to measure the indoor environment and comfort. AM30x is widely used for offices, stores, classrooms, hospitals, etc.



Sensor data is transmitted using LoRaWAN® technology. Combining Milesight LoRaWAN® gateway and Milesight IoT Cloud, users can manage all sensor data remotely and visually.

◆ Features

- Integrated with multiple sensors like humidity, temperature, CO₂, light, barometric pressure, PM2.5, PM10, etc.
- Multiple display modes and clear emoticon to easily understand the comfort levels via screen
- Support batteries or DC power supply
- Equipped with traffic light indicator and buzzer to indicate device status and threshold alarms
- Store locally 18, 000 historical records and support retransmission to prevent data loss
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud and Milesight Development Platform

◆ Specifications

Model	AM307	AM308(L)
Wireless Transmission		
Technology	LoRaWAN®	
Frequency	CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923-1&2&3&4	
Tx Power	16dBm(868MHz)/22dBm(915MHz)/19dBm(470MHz)	
Sensitivity	-137dBm @300bps	
Work Mode	OTAA/ABP Class A	
Sensors		
Temperature		
Operating Principle	Digital CMOSens® technology (MEMS)	
Range	-20°C~60°C	
Accuracy	± 0.2°C	
Resolution	0.1°C	
Humidity		
Operating Principle	Digital CMOSens® technology (MEMS)	
Range	0% ~ 100% RH	
Accuracy	± 2% RH	
Resolution	0.5% RH	
Motion		
Operating Principle	Passive infrared (PIR)	
Detection Range	80 ° Horizontal, 55 ° Vertical, 5m	
Status	Vacant/Occupied	
Light		
Operating Principle	Photodiode	
Range	0-60000 Lux (Determine as 6 levels, 0-5)	
TVOC		
Operating Principle	MOX (MEMS)	
Range ¹	1.00 ~ 5.00 (IAQ Rating)	
Accuracy	±1	
Resolution	0.01	
Barometric Pressure		
Operating Principle	Piezoresistive absolute pressure sensor (MEMS)	
Range	260 - 1260 hPa	



Accuracy	±0.5 hPa	
Resolution	0.1 hPa	
Carbon Dioxide (CO ₂)		
Operating Principle	Nondispersive Infrared (NDIR)	
Range	400 ~ 5000 ppm	
Accuracy	± (30 ppm + 3 % of reading) (0°C~ 50°C, 0% to 85%RH)	
Resolution	1 ppm	
PM2.5 & PM10		
Operating Principle	—	Laser Scattering
Range	—	0 ~ 1000 µg/m ³
Accuracy	—	0~100(±10µg/m ³), 100~1000(±10 %) (-10°C~ 60°C)
Resolution	—	1 µg/m ³
Other Interfaces		
Display	AM307 & AM308: 4.2-inch Black & White E-Ink Screen AM308L: Not Support	
Button	1 × Power Button + 1 × Reset Button	
LED & Buzzer	1 × Traffic Light Status Indicator + 1 × Buzzer	
USB	1 × Type-C Port for Power Supply, Configuration or Console	
Software		
Configuration	1. Mobile App via NFC 2. PC software via NFC or USB Type-C port 3. Downlink	
Advanced Features	Threshold Alarm, Data Storage, Data Retrievability, Data Retransmission	
Physical Characteristics		
Power Supply	1. 4 × 2700 mAh ER14505 Li-SOCl ₂ Replaceable Batteries 2. 5V/1A by Type-C Port	
Battery Life ² (10 min interval, 25°C)	AM307: Around 3 Years	AM308: Over 1 Year AM308L: Around 1.5 Year
Operating Temperature	-20°C - 60°C (E-Ink Screen: 0°C - 40°C)	
Relative Humidity	10% - 90% (non-condensing)	
Ingress Protection	IP30	
Dimension	100.8 × 114 × 22 mm (3.97 × 4.49 × 0.87 in)	
Installation	Wall Mounting via 3M Tape or Screws	



Approvals

Regulatory	CE, FCC, ISED
Environmental	RoHS

Note:

- Reference to IAQ rating guideline (conversion from mg/m³ to ppm by the factor is about 0.5):

IAQ Rating	Air Quality
≤1.99	Very Good
2.00 to 2.99	Good
3.00 to 3.99	Medium (not recommended for exposure > 12 months)
4.00 to 4.99	Poor (not recommended for exposure > 1 months)
≥5.00	Bad (not recommended)


- The battery life is tested under laboratory conditions and for guideline purposes only.



Indoor Ambience Monitoring Sensor

Featuring LoRaWAN®

AM319

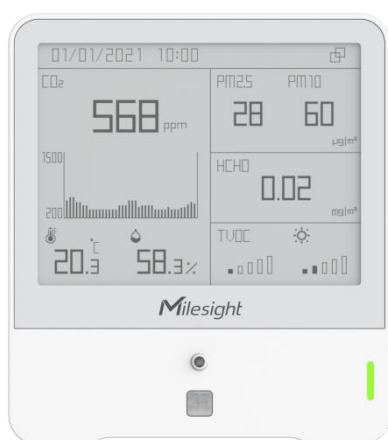The Milesight logo, featuring a stylized blue 'M' followed by the word 'Milesight' in a blue sans-serif font.

◆ Introduction

AM319 is a compact indoor ambience monitoring sensor for measurement of temperature, humidity, light, CO₂ concentration, HCHO/O₃ level, TVOC, barometric pressure, PM2.5, PM10 and motion. The data will be shown on the E-ink screen in real-time, which helps to measure the indoor environment and comfort. AM319 is widely used for offices, stores, classrooms, hospitals, etc.

Sensor data is transmitted using LoRaWAN® technology. Combining Milesight LoRaWAN® gateway and Milesight IoT Cloud, users can manage all sensor data remotely and visually.

◆ Features

- Integrated with multiple sensors like humidity, temperature, CO₂, light, barometric pressure, PM2.5, PM10, etc.
- Multiple display modes and clear emoticon to easily understand the comfort levels via screen
- Support DC power supply
- Equipped with traffic light indicator and buzzer to indicate device status and threshold alarms
- Store locally 18, 000 historical records and support retransmission to prevent data loss
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud and Milesight Development Platform

◆ Specifications

Wireless Transmission

Technology	LoRaWAN®
Antenna	Internal Antennas
Frequency	CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16dBm(868MHz)/22dBm(915MHz)/19dBm(470MHz)
Sensitivity	-137dBm @300bps
Work Mode	OTAA/ABP Class C

Sensors

Temperature

Operating Principle	Digital CMOSens® technology (MEMS)
Range	-20°C~60°C
Accuracy	± 0.2°C
Resolution	0.1°C

Humidity

Operating Principle	Digital CMOSens® technology (MEMS)
Range	0% ~ 100% RH
Accuracy	± 2% RH
Resolution	0.5% RH

Motion

Operating Principle	Passive infrared (PIR)
Detection Range	80 ° Horizontal, 55 ° Vertical, Maximum 5m
Status	Vacant/Occupied

Light

Operating Principle	Photodiode
Range	0-60000 Lux (Determine as 6 levels, 0-5)

TVOC

Operating Principle	MOX (MEMS)
Report Mode ¹	IAQ Rating or Concentration Value
IAQ Rating	Range: 1.00 - 5.00
	Accuracy: ±1
	Resolution: 0.01
Concentration	Range: 0 - 2000 µg/m ³
	Accuracy: 20 µg/m ³ ±15% of readings (1 - 500 µg/m ³)

	Resolution: 1 µg/m ³
Barometric Pressure	
Operating Principle	Piezoresistive absolute pressure sensor (MEMS)
Range	260 - 1260 hPa
Accuracy	±0.5 hPa
Resolution	0.1 hPa
Carbon Dioxide (CO₂)	
Operating Principle	Photoacoustic
Range	400 ~ 2000 ppm
Accuracy	± (50 ppm + 5 % of reading) (-10°C~ 60°C)
Resolution	1 ppm
PM2.5 & PM10	
Operating Principle	Laser Scattering
Range	0 ~ 1000 µg/m ³
Accuracy	0~100(±10µg/m ³), 100~1000(±10 %) (-10°C~ 60°C)
Resolution	1 µg/m ³
Formaldehyde (HCHO)²	
Operating Principle	Electrochemical
Range ³	0 ~ 1.25 mg/m ³
Accuracy	±10 %
Resolution	0.01 mg/m ³
Working Life	6 Years
Ozone (O₃)²	
Operating Principle	Electrochemical
Range	0 ~ 10 ppm
Accuracy	±5 % FS
Resolution	0.01 ppm
Working Life	2 Years
Other Interfaces	
Display	4.2-inch Black & White E-Ink Screen
Button	1 × Power Button + 1 × Reset Button
LED & Buzzer	1 × Traffic Light Status & Alarm Indicator + 1 × Buzzer
USB	1 × Type-C Port for Power Supply, Configuration or Debug
Software	
Power On/Off	1. Mobile App via NFC



	2. PC software via NFC or USB Type-C port 3. Power Button
Configuration	1. Mobile App via NFC 2. PC software via NFC or USB Type-C port 3. Downlink
Advanced Features	Threshold Alarm, Data Storage, Data Retrievability, Data Retransmission
Physical Characteristics	
Power Supply	5V/1A by Type-C Port
Operating Temperature	-20°C - 60°C (E-Ink Screen: 0°C - 40°C)
Relative Humidity	10% - 90% (non-condensing)
Ingress Protection	IP30
Housing & Color	ABS (UL94 HB), White
Weight	148g
Dimension	100.8 × 114 × 22 mm (3.97 × 4.49 × 0.87 in)
Installation	Wall Mounting via 3M Tape or Screws
Approvals	
Regulatory	CE, FCC, ISED
Environmental	RoHS, Works with WELL

Note:

1. Reference to IAQ rating guideline (conversion from mg/m³ to ppm by the factor is about 0.5):

IAQ Rating	TVOC (mg/m ³)	Air Quality
≤1.99	<0.3	Very Good
2.00 to 2.99	0.3 to 1.0	Good
3.00 to 3.99	1.0 to 3.0	Medium (not recommended for exposure > 12 months)
4.00 to 4.99	3.0 to 10.0	Poor (not recommended for exposure > 1 months)
≥5.00	>10.0	Bad (not recommended)


2. HCHO or O₃ sensor is alternative option and both support replacement.
3. For HCHO at 760 mmHg and 20°C, 1 ppm = 1.25 mg/m³.

◆ Ordering Information

Model	PN	Description
AM319	HCHO-IR	Temperature, Humidity, Light, Motion, CO ₂ , TVOC, Pressure, PM2.5, PM10, HCHO
	O ₃	Temperature, Humidity, Light, Motion, CO ₂ , TVOC, Pressure, PM2.5, PM10, O₃



◆ Dimensions (mm)

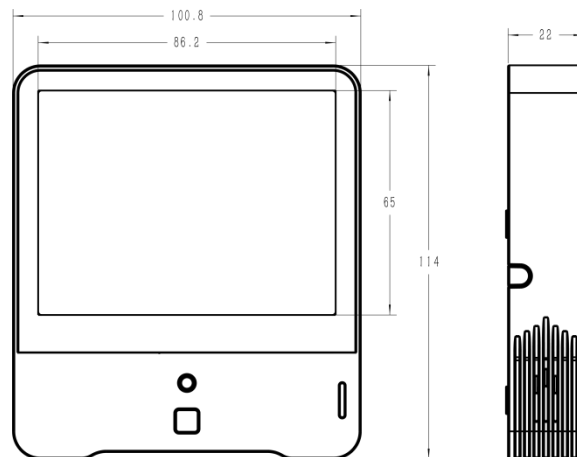

◆ PIR Area

